

UNDERCOUNTER FREEZER

MODEL DUC48F

2-Door





TECHNICAL SPECIFICATIONS

Voltage/Frequency
Refrigerant
R290
Type of Defrost
Interial Material
Exterior Material
Temperature Range °F
Compressor Power (HP)
Nema Config.
NEMA5-15P



PRODUCT FEATURES

The compressor is mounted in the back and placed in the coolest possible area; this makes it easily accessible for servicing.

STEAR COMPRE

- BB Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
- Temperatures in the cabinet range from 0 to -8 degrees Fahrenheit.
- Higher Resistance to dust, high quality condenser.
- R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.
- Self-closing doors at 60° with stay open feature.
- Stainless steel interior & exterior, sealed interior floors, and rounded cabinet corners for easy cleaning.
- High quality coated stainless adjustable shelves prevent peel and rust.
- Lifetime warranty on hinges.
- 6" casters with lock for easy mobility.



HIGH QUALITY STAINLESS STEEL & ROBUST DESIGN



Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey


1-800-931-8628


info@dukersusa.com

www.DukersUSA.com

DETAILS &SPECIFICATIONS

UNDERCOUNTER DUC48F

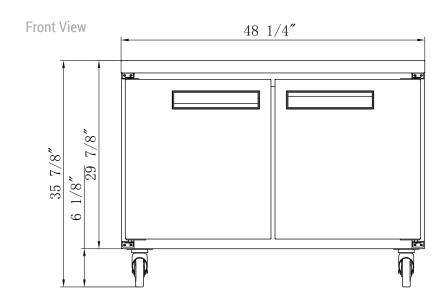

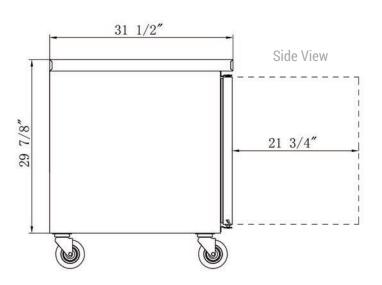

MODEL DUC48F

Rated Voltage 115V Rated Frequency 60Hz 660W **Total Input Power Total Current** 8.0A **Total Capacity** 12.21 cu ft 4-5 **Climatic Category Protection Type** Design Pressure High Side **300 PSIG 150 PSIG Design Pressure Low Side Insulation Blowing Gas C-Pentane** Refrigerant R290/3.70oz

| MODEL | EXTERNAL DIMENSION WXDXH (INCHES) | PACKAGING DIMENSION WXDXH (INCHES) | | | 40HQ CONTAINER CERT. |
|--------|-----------------------------------|---------------------------------------|---------|---|-------------------------|
| DUC48F | 48 1/4 x 31 1/2 x 36 | 49 5/8 x 33 1/8 x 39 3/8 | 211 lbs | 2 | 46 |

















① 1-800-931-8628 ② info@dukersusa.com